

Transformer, 1:4 Transmission Line Transformer 5 to 1200 MHz

Rev. V2

#### **Features**

- 1:4 Impedance ratio
- Surface mount
- Available on tape and reel
- 260°C reflow compatible
- RoHS\* compliant and lead free
- **Excellent temperature stability**
- Excellent amplitude and phase balance
- Can be used in both  $50\Omega$  and  $75\Omega$  systems

### **Description**


M/ACom Technology Solutions MABA-010129-CT4A40 is a 1:4 RF transmission line transformer in a low cost, surface mount package. Ideally suited for broadband CATV applications.




## **Pin Configuration**

Pin no.	Function		
1	Secondary Dot		
2	Secondary Centre Tap		
3	Secondary		
4	Primary		
5	Primary Dot		

#### **Schematic**



### Component dimensions

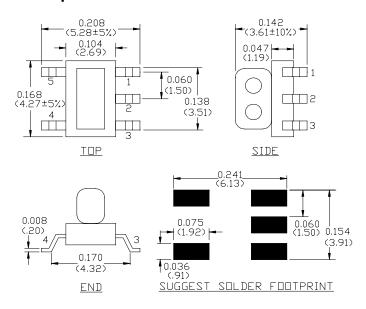

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010, unless otherwise stated

- India Tel: +91.80.43537383
- China Tel: +86.21.2407.1588

<sup>\*</sup> Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.



Transformer, 1:4 Transmission Line Transformer 5 to 1200 MHz

Rev. V2


## Electrical Specifications: $T_A = 25$ °C, 0dBm, $Z_0 = 50\Omega$ , $P_{in} = 0$ dBm

Parameter	Frequency	Units	Min	Тур	Max
Insertion Loss 1 (Pin 4 to Pin 1)	5 - 50MHz 50 - 879MHz 879 - 1200MHz	dB dB dB	- - -	0.5 0.7 1.2	0.7 1.5 2.0
Insertion Loss 2 (Pin 4 to Pin 3)	5 - 50MHz 50 - 879MHz 879 - 1200MHz	dB dB dB	- - -	0.5 0.6 0.8	0.7 1.2 1.6
Amplitude Balance (Nominal 0dB)	5 - 500MHz 500 - 1200MHz	dB dB	-	0.05 0.23	±0.6 ±2.1
Phase Balance (Nominal 180°)	5 - 500MHz 500 - 1000MHz 1000 - 1200MHz	0 0 0	- - -	1.4 2.8 0.2	±6 ±8 ±22
Input Return Loss (Pin4)	5 - 50 MHz 50 - 500 MHz 500 - 1200 MHz	dB dB dB	20 15 11	25 23 16	- - -

## **Recommended Maximum Ratings**

Parameter	Value		
Input power	At least +28dBm (631mW)		
DC current (tested at 5V)	At least 600mA		
Operating Temperature	-40°C to +85°C		
Storage Temperature	-55°C to +100°C		

## **Application Circuit**

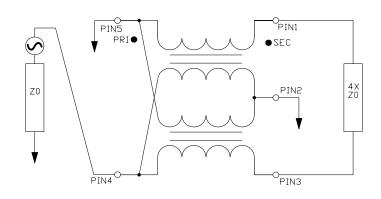

• India Tel: +91.80.43537383 Visit www.macomtech.com for additional data sheets and product information.

• China Tel: +86.21.2407.1588




Transformer, 1:4 Transmission Line Transformer 5 to 1200 MHz


Rev. V2

## Typical Performance Curves: $T_A = 25^{\circ}C$ , 0dBm, $Z_0 = 50\Omega$ , $P_{in} = 0dBm$


### Insertion Loss 1: (Pin 4 to 1)

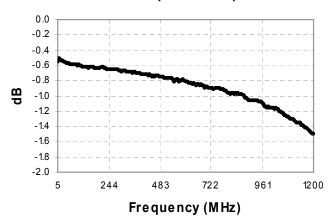


### Insertion Loss 2: (Pin 4 to 3)

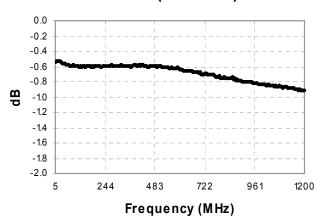


### **Amplitude Balance**

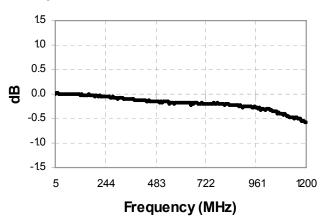

#### **Phase Balance**

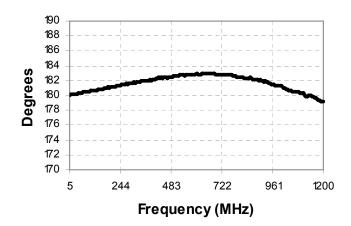

### Return Loss: Input (Pin 4)

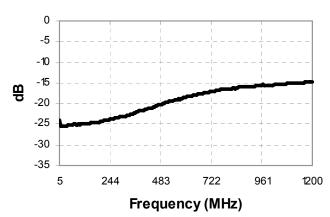

3 \_


North America Tel: 800.366.2266
India Tel: +91.80.43537383
China Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.



Transformer, 1:4 Transmission Line Transformer 5 to 1200 MHz

Rev. V2

### **Tape & Reel Information**

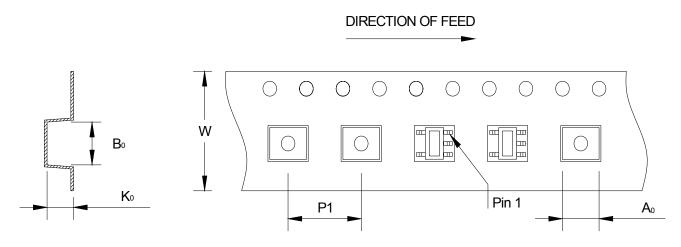

Item	Dimension	
Ao	5.9mm +/- 0.1mm	
Во	4.55mm +/- 0.1mm	
Ko	3.8mm +/- 0.1mm	
W	12.0mm +/- 0.3mm	
P1	8.00mm +/- 0.1mm	

## **Ordering Information**

Part number	Description		
MABA-010129-CT4A40	2000 piece reel		

• India Tel: +91.80.43537383

• China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.