
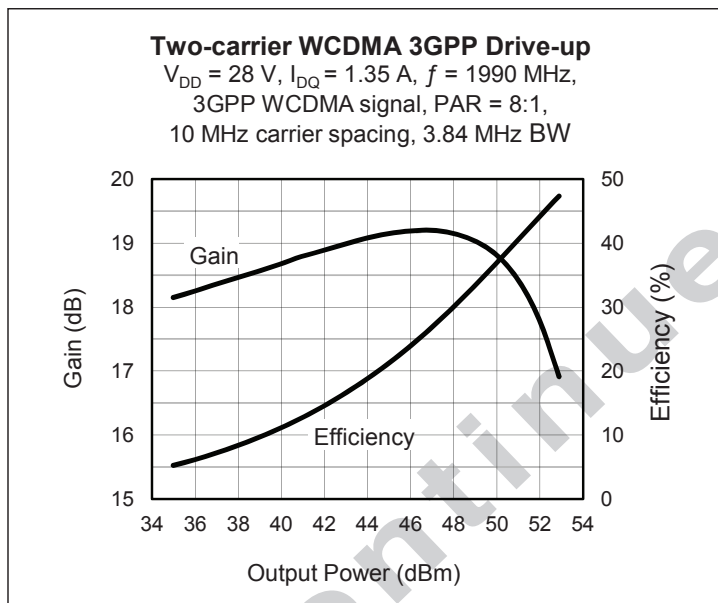


Thermally-Enhanced High Power RF LDMOS FET 255 W, 28 V, 1930 – 1990 MHz

Description

The PTFB192557SH is a 250-watt LDMOS FET designed specifically for use in Doherty cellular power amplifier applications in the 1930 to 1990 MHz frequency band. Input and output matching has been optimized for maximum performance as the peak side transistor in Doherty amplifiers. Manufactured with Infineon's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.

PTFB192557SH
Package H-34288G-4/2
(formed leads)



Features

- Optimized for use as peak side in Doherty amplifiers
- Input and output internal matching
- Typical CW pulsed performance, 1990 MHz, 28 V
 - Output power at $P_{1dB} = 250\text{ W}$
 - Efficiency = 55%
 - Gain = 18.6 dB
- Integrated ESD protection
- Low thermal resistance
- Pb-free and RoHS-compliant
- Capable of handling 10:1 VSWR at 28 V, 250 W (CW) output power

RF Characteristics

Single-carrier WCDMA Performance (tested in standard Infineon test fixture)

(WCDMA signal: 3GPP, 3.84 MHz channel bandwidth, with 10 dB peak/average @ 0.01% CCDF)

$V_{DD} = 28\text{ V}$, $I_{DQ} = 1.35\text{ A}$, $P_{OUT} = 60\text{ W}$ average, $f = 1990\text{ MHz}$

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	18	19	—	dB
Drain Efficiency	η_D	29	31	—	%
Adjacent Channel Power Ratio	ACPR	—	-33.5	-32	dBc

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

Target RF Characteristics (cont.)

DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 28\text{ V}, V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1.0	μA
	$V_{DS} = 63\text{ V}, V_{GS} = 0\text{ V}$	I_{DSS}	—	—	10.0	μA
On-State Resistance	$V_{GS} = 10\text{ V}, V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.05	—	Ω
Operating Gate Voltage	$V_{DS} = 28\text{ V}, I_{DQ} = 1.35\text{ A}$	V_{GS}	2.3	2.8	3.3	V
Gate Leakage Current	$V_{GS} = 10\text{ V}, V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1	μA





Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	65	V
Gate-Source Voltage	V_{GS}	-6 to +10	V
Junction Temperature	T_J	200	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-40 to +150	$^{\circ}\text{C}$
Thermal Resistance ($T_{CASE} = 70^{\circ}\text{C}, 200\text{ W CW}$)	$R_{\theta JC}$	0.232	$^{\circ}\text{C/W}$





Ordering Information

Type and Version	Order Code	Package and Description	Shipping
PTFB 192557SH V1 R250	PTFB192557SHV1R250XTMA1	H-34275G-6/2, ceramic open-cavity, formed leads, earless	Tape & Reel, 250 pcs

Typical Performance (data taken in a production test fixture)

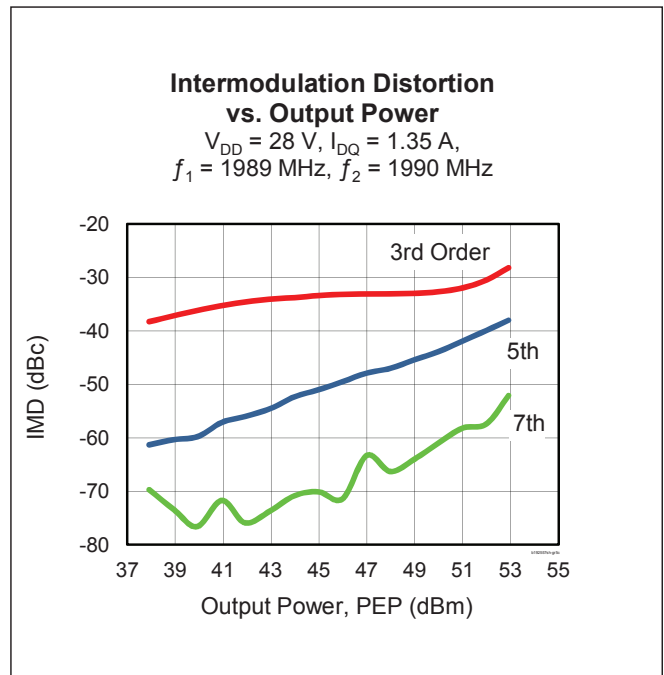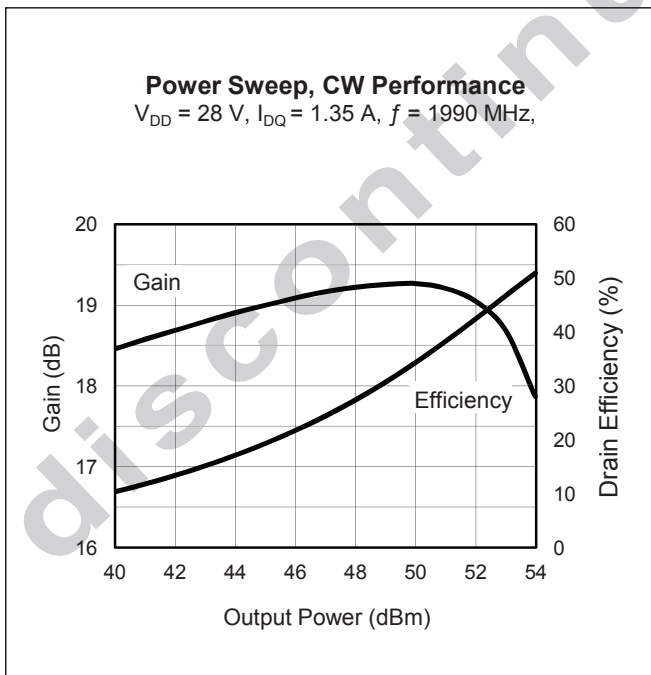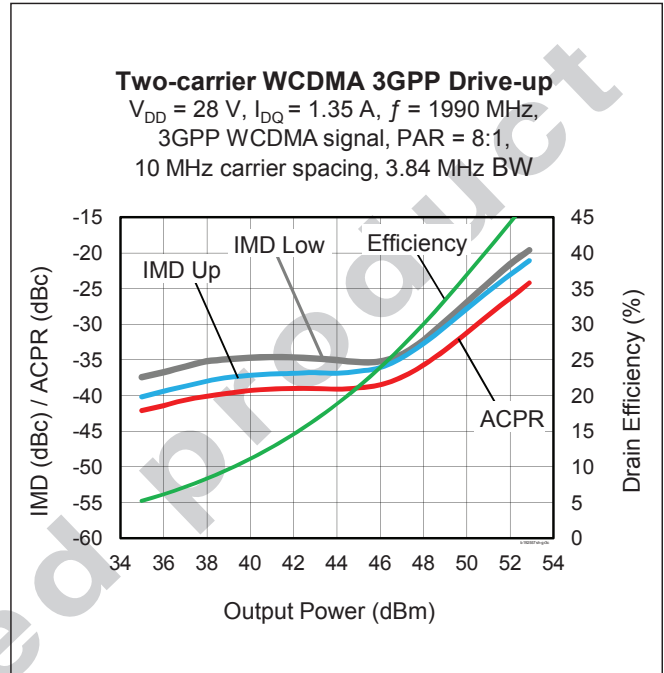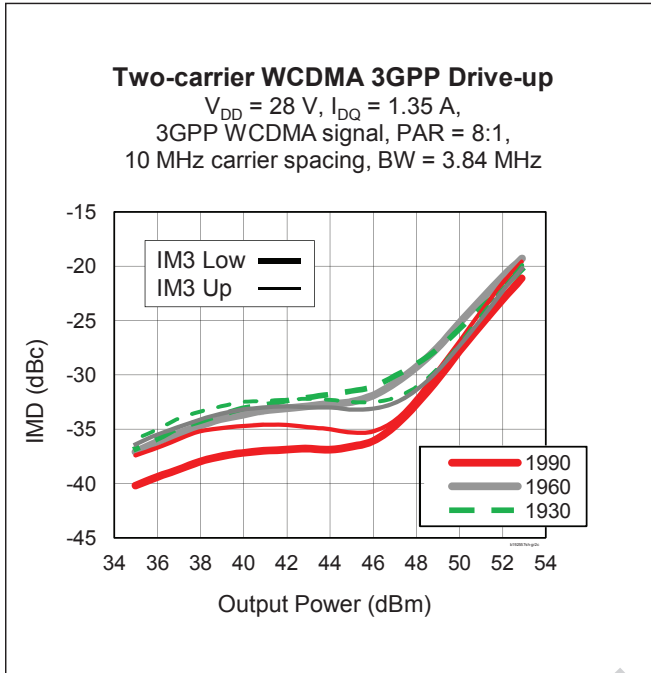


Typical Performance (cont.)

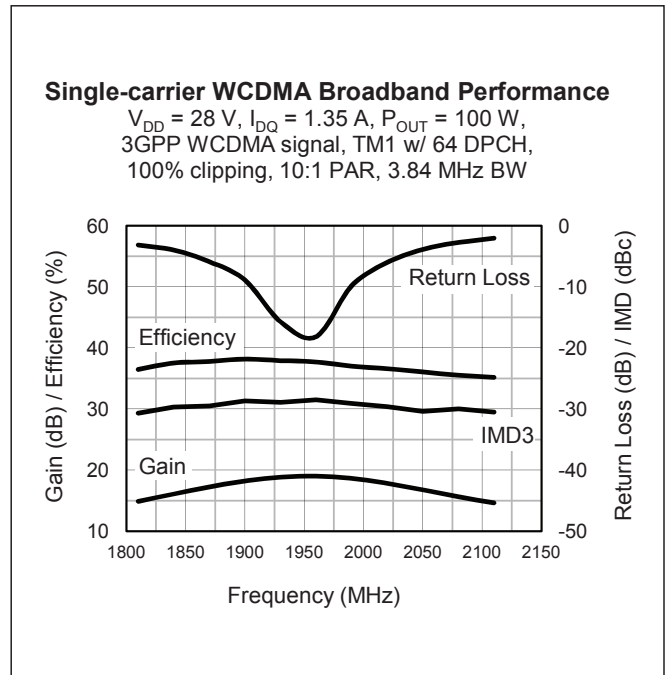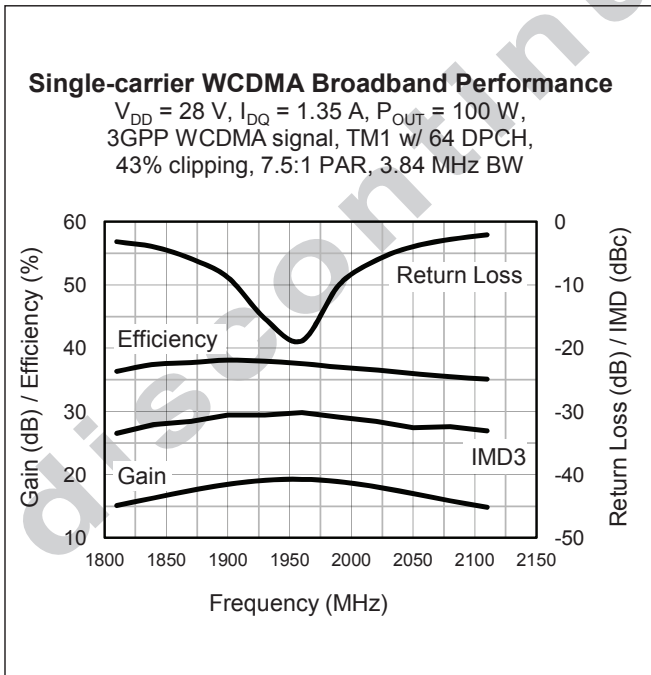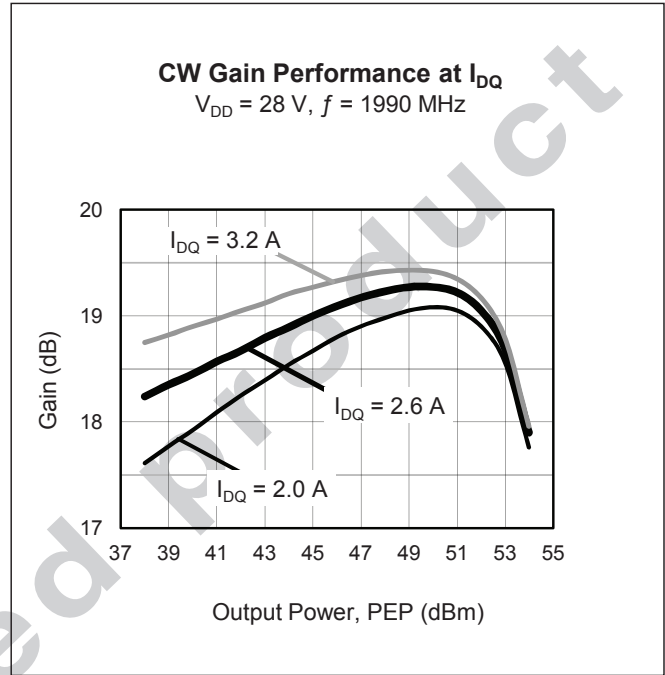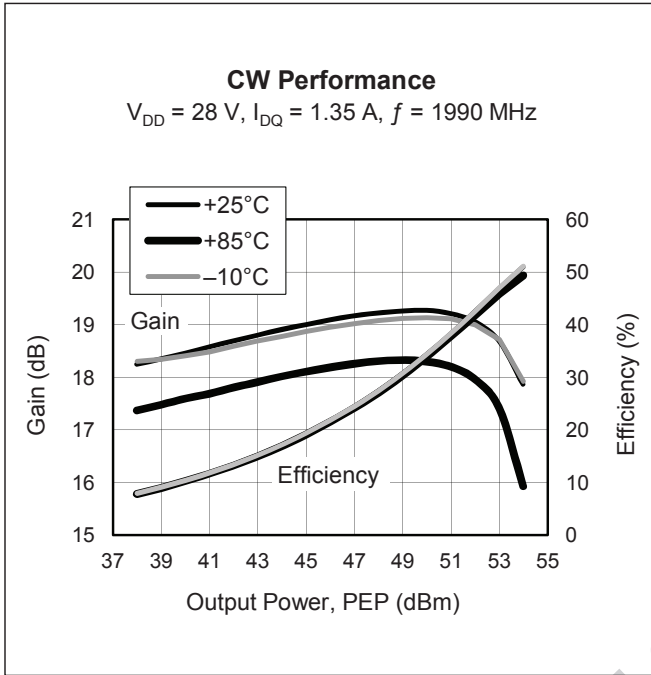


Broadband Circuit Impedance

Frequency MHz	Z Source Ω		Z Load Ω	
	R	jX	R	jX
1900	2.36	-5.38	2.18	-1.47
1910	2.32	-5.32	2.20	-1.42
1920	2.28	-5.26	2.23	-1.37
1930	2.24	-5.19	2.26	-1.32
1940	2.21	-5.13	2.29	-1.27
1950	2.17	-5.07	2.32	-1.22
1960	2.13	-5.01	2.35	-1.17
1970	2.10	-4.95	2.38	-1.12
1980	2.07	-4.89	2.42	-1.07
1990	2.03	-4.83	2.46	-1.03
2000	2.00	-4.77	2.49	-0.98

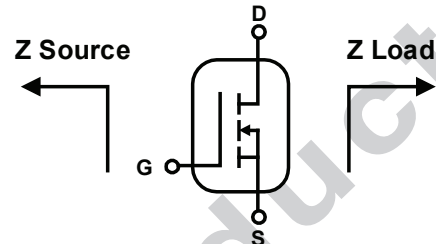

Reference Circuit

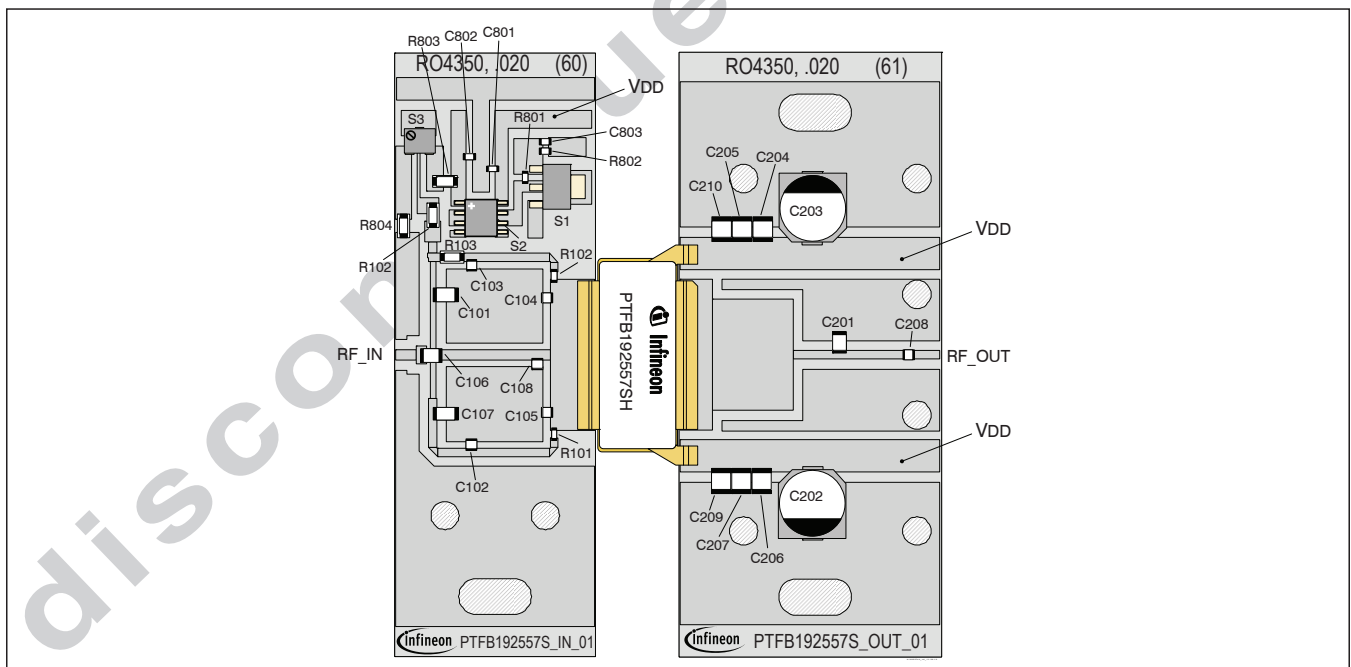

Reference circuit assembly diagram (not to scale)

Reference Circuit Assembly

DUT	PTFB192557SH V1
Test Fixture Part No.	LTN/PTFB192557SH
PCB	Rogers 4350, 0.508 mm [.020"] thick, 2 oz. copper, $\epsilon_r = 3.66$

Find Gerber files for this test fixture on the Infineon Web site at <http://www.infineon.com/rfpower>

Reference Circuit (cont.)

Component Information

Component	Description	Suggested Supplier	P/N
Input			
C101, C107	Chip capacitor, 5 μ F	Digi-Key	PCS3475CT-ND
C102, C103	Chip capacitor, 10 pF	ATC	ATC100A100JW500XB
C104, C105	Chip capacitor, 2 pF	ATC	ATC100A2R2CW500XB
C106	Chip capacitor, 10 pF	ATC	ATC100B100JW500XB
C108	Chip capacitor, 2 pF	ATC	ATC100A2R0CW150XB
R101, R102	Resistor, 10 Ω	Digi-Key	P10GCT-ND
R103, C104	Resistor, 10 Ω	Digi-Key	P10ECT-ND
S1	Potentiometer, 2k Ω	Digi-Key	3224W-202ECT-ND
S2	Transistor	Infineon Technologies	BCP56-ND
S3	Voltage Regulator	Digi-Key	LM780L05ACM-ND
Output			
C201, C202, C203, C204, C205, C206, C210, C211	Capacitor, 10 μ F	Digi-Key	587-1818-2-ND
C207	Chip capacitor, 2 pF	ATC	ATC100A1R7CW150XB
C208	Chip capacitor, 18 pF	ATC	ATC100B180JW500XB
C209	Chip capacitor, 1 pF	ATC	ATC100B0R9CW500XB

Package Outline Specifications

Package H-34288G-4/2 (formed leads)

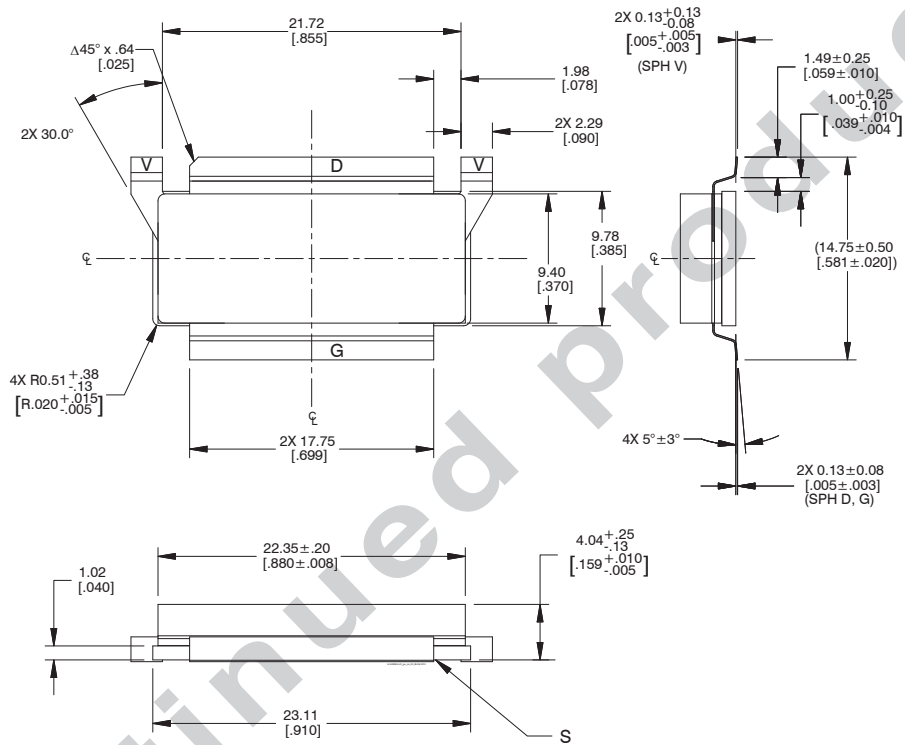


Diagram Notes—unless otherwise specified:

1. Interpret dimensions and tolerances per ASME Y14.5M-1994.
2. Primary dimensions are mm. Alternate dimensions are inches.
3. All tolerances ± 0.127 [0.005] unless specified otherwise.

Diagram Notes—unless otherwise specified:

1. Interpret dimensions and tolerances per ASME Y14.5M-1994.
2. Primary dimensions are mm. Alternate dimensions are inches.
3. All tolerances ± 0.127 [0.005] unless specified otherwise.
4. Pins: G – gate, D – drain, S – source, V – V_{DD}.
5. Lead thickness: 0.10 +0.051/–0.025 [0.004 +.002/–.001].
6. Gold plating thickness: 0.25 micron [10 microinch] max.

Find the latest and most complete information about products and packaging at the Infineon Internet page (<http://www.infineon.com/rfpower>)

PTFB192557SH V1

Revision History: 2016-06-08

Data Sheet

Previous Version: 2015-10-01 , Data Sheet


Page	Subjects (major changes since last revision)
All	Product Discontinued. Please see PD Notes: PD_028_16

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?
Your feedback will help us to continuously improve the quality of this document.
Please send your proposal (including a reference to this document) to:

highpowerRF@infineon.com

To request other information, contact us at:
+1 877 465 3667 (1-877-GO-LDMOS) USA
or +1 408 776 0600 International



Edition 2016-06-08

**Published by
Infineon Technologies AG
85579 Neubiberg, Germany**

**© 2012 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com/rfpower).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.