



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	02	M2	REVISED PER ECO-11-004820	11MAR11	RK HMR

AMP WIRE RANGE	AMP INSULATION RANGE
22-16 AWG 0.3-1.5 mm ²	.140 MAX DIA 3.5 MAX DIA

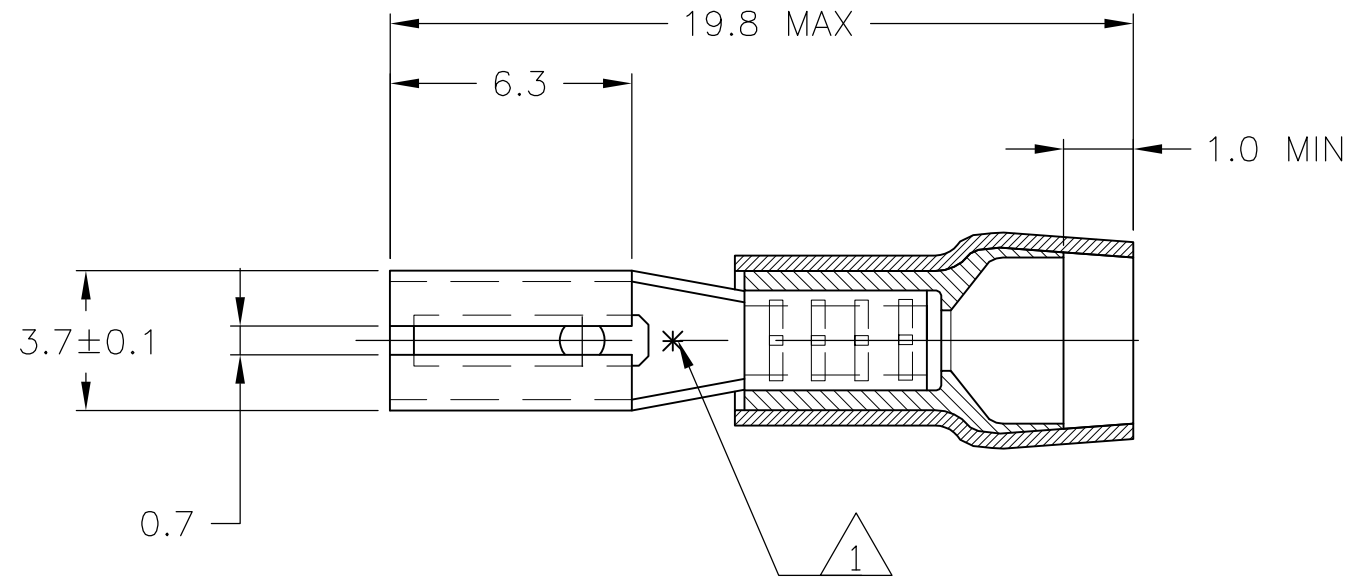

- △1 ASTERISK * FOR PHOS BRONZE VERSION ONLY
- △2 OBSOLETE W/O REPLACEMENT

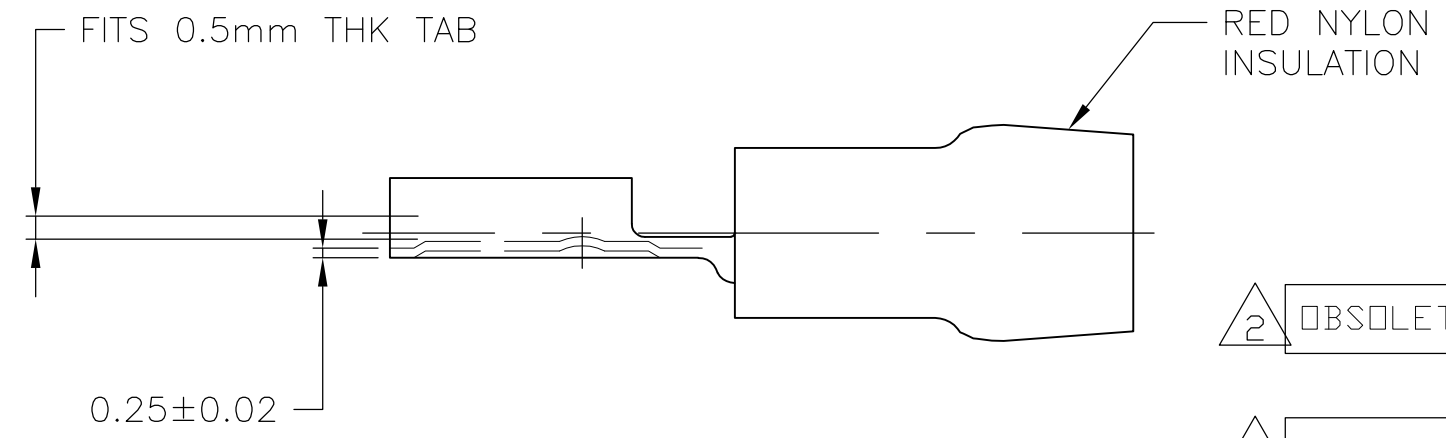

PN ON TAPE	FINISH	MATERIAL	PART NUMBER
	GOLD	PHOS BRONZE	165565-6
△2 OBSOLETE	GOLD	BRASS	165565-5
	SILVER	PHOS BRONZE	165565-4
△2 OBSOLETE	SILVER	BRASS	165565-3
2-165565-2	TIN	PHOS BRONZE	165565-2
2-165565-1	TIN	BRASS	165565-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr_ruth 15APR05	STE TE Connectivity	
DIMENSIONS: mm		CHK T MICHELUTTI 15APR05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T MICHELUTTI 15APR05	NAME	
0 PLC ± -		PRODUCT SPEC	RECEPTACLE, FASTON, PIDG, .110 SERIES	
1 PLC ± 0.2		APPLICATION SPEC	SIZE	RESTRICTED TO
2 PLC ± -		WEIGHT -	CAGE CODE	
3 PLC ± -		CUSTOMER DRAWING	DRAWING NO	
4 PLC ± -			SCALE	
ANGLES ± 5°			SHEET	
FINISH -			REV	
MATERIAL -			1 OF 1	M2