THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	FIRST VERSION	23NOV2015	G.F	S.H

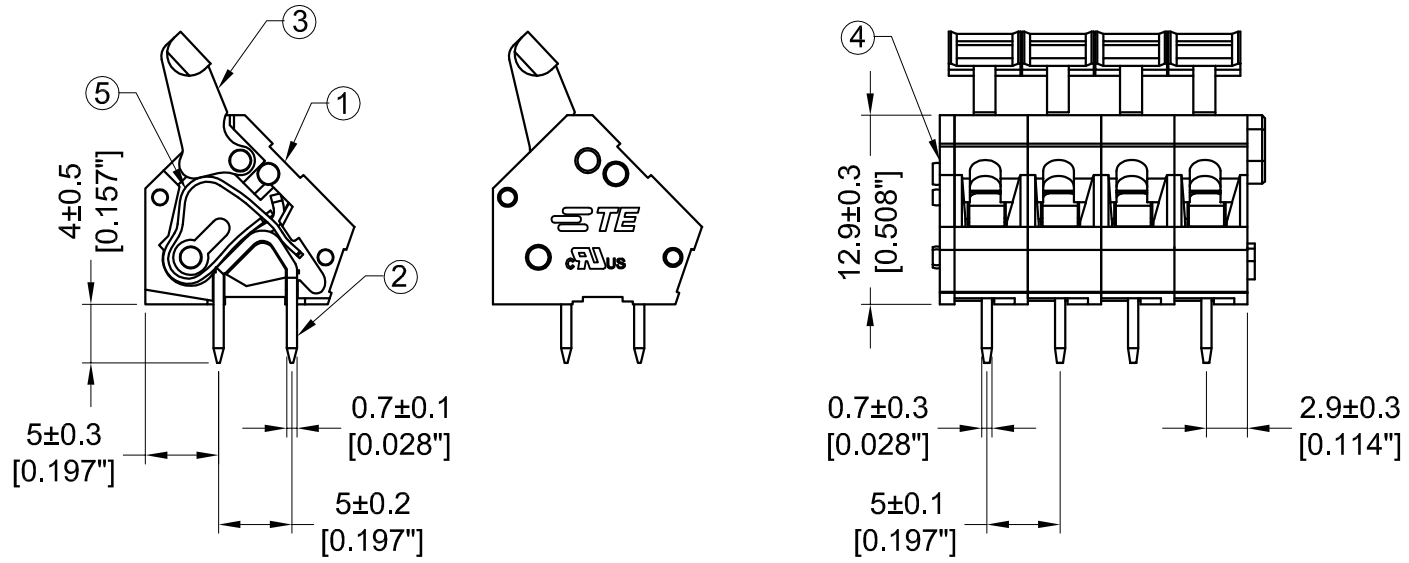

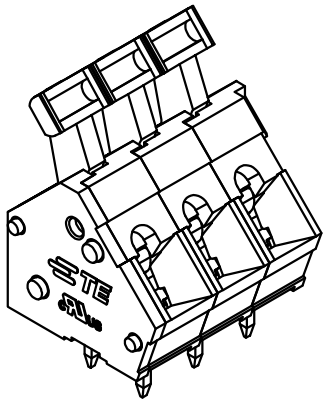

⑤	SPRING
④	COVER
③	LEVER
②	CONTACT
①	HOUSING

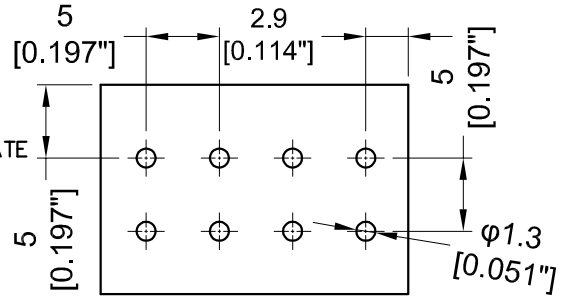

PCB Layout

NOTES :

⚠1 MATERIALS AND FINISH:
- HOUSING: PA66
- CONTACTS: BRASS, FINISH: TIN OVER NICKEL UNDERPLATE

2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (RoHS)
3. WIRE TYPES AND SIZES ACCEPTED
   WIRE RANGE: 14AWG~28AWG.
   STRIP LENGTH: 10mm
4. PACKAGED IN TRAY.
5. CURRENT RATING: 16Amp AC300V.
6. OPERATION TEMPERATURE: −40°C TO +105°C
7. THIS PART No. IS THE SAME STRUCTURE AS THE SERIES: 2834076
   THE DATASHEET AND MORE DETAILS PLEASE FOLLOW THE SERIES: 2834076

COLOR	DIM A	NO. OF POSITIONS	PART NO
GRAY	41.00	8 POSN	2834076-7
	36.00	7 POSN	2834076-6
	31.00	6 POSN	2834076-5
	26.00	5 POSN	2834076-4
	21.00	4 POSN	2834076-3
	16.00	3 POSN	2834076-2
	11.00	2 POSN	2834076-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED
0 PLC ±0.20
1 PLC ±0.13
2 PLC ±0.1
3 PLC
4 PLC
ANGLES ±2°

MATERIAL ⚠1
FINISH ⚠1

DWN	GEORGE FU	23NOV2015
CHK	SHI MING	23NOV2015
APVD	XU XIANG	23NOV2015
PRODUCT SPEC	108-137146	
APPLICATION SPEC	114-137146	
WEIGHT	-	

TE Connectivity

NAME: 5.00mm 45° Entry Screwless Connector

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2834076	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV A