



DIMENSIONS mm (inches)

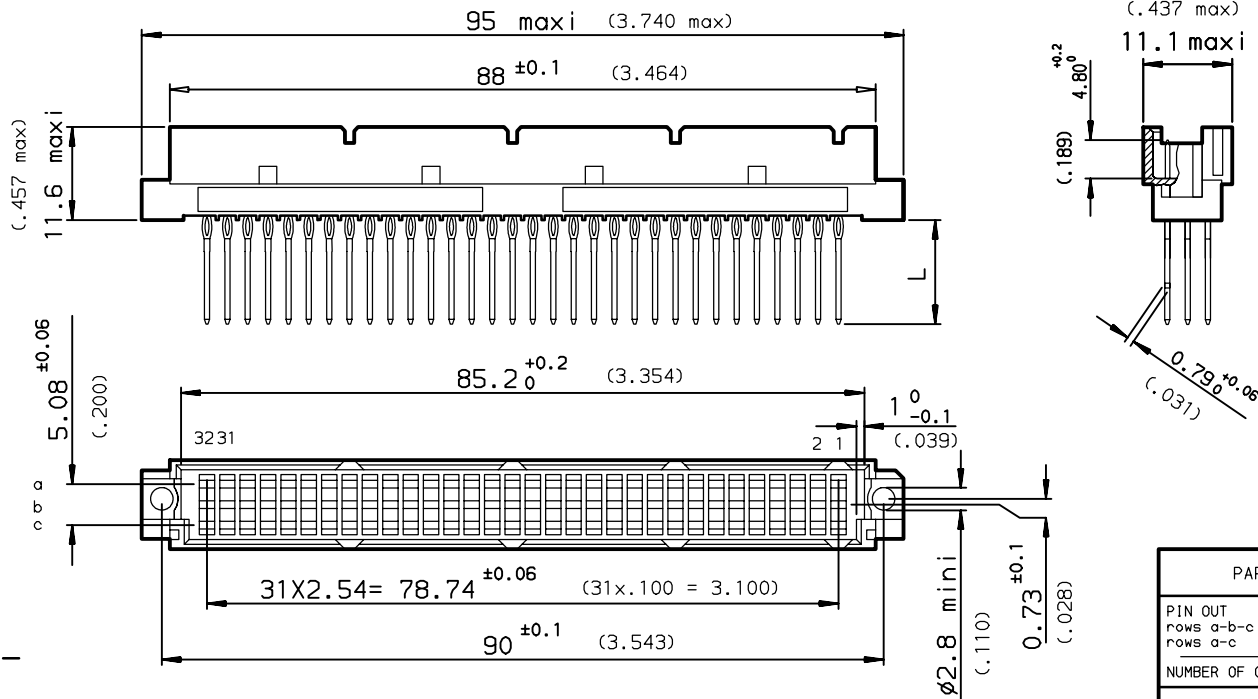

PART NUMBER	8609			79		7		5	
PIN OUT									
rows a-b-c						3		96	
rows a-c						4		64	
NUMBER OF CONTACTS									
TERMINATION									
L = 13.25 ±0.25 (0.521)								1	91
L = 17.25 ±0.25 (0.679)								2	92
L = 20.00 ±0.25 (0.787)								3	93
L = 4.20 ±0.25 (0.165)								short post	94
PERFORMANCE CLASS									
DIN 41612 class 3									4
DIN 41612 class 2									5
DIN 41612 class 1									6
TERMINATION TYPE									
TIN LEAD									000E1
LEAD FREE									E1LF

PCB DRILLING

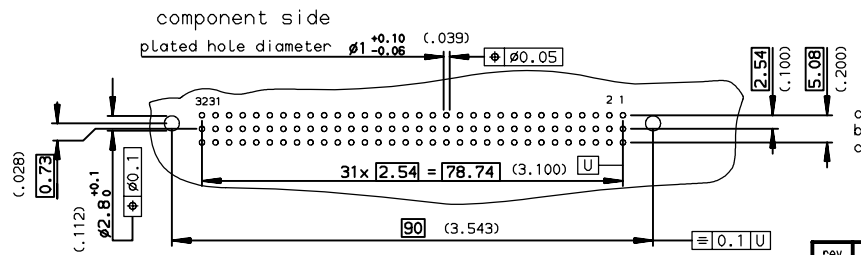

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
 SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1997/10/31	0.X	±0.1	size
Eng	TARON	1997/10/31	ANGULAR	0.XX	A3
Chr	LEGARE	1997/10/31	0.XX' ±2'	0.XXX	Scale
Appr	LEGARE	1997/10/31	Product family	DIN 8609	1.5
				ECN	LS06-0095
				Spec ref	-
		STRAIGHT MALE - STYLE HE 11		dwg no	C-8609-0661
		PRESS FIT		Rev.	E
catalog no				CUSTOMER	sheet 1 of 1

rev	ecn no	dr	date
C	-	ROU	1999/04/22
D	LS05-004	JTA	2005/02/11
E	LS06-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-