



Pin Out


Conn. 2	Wire Color	Conn. 1
4	Black(24AWG)	4
3	Green(28AWG)	3
2	White(28AWG)	2
1	Red(24AWG)	1
5	Drain(28AWG)	Shield

Twist

Note:

- IP67 waterproof rated
- Connector: Black, ABS 94v-0
- USB: USB-A Female solder
- Housing: JWT, 5pin, PH=2.5mm, Nylon 66 UL94V-0
- Cable: USB2.0 28AWG*1P+24AWG*2C+AL.My+D+B
UV Resistant, Black, OD=5.0mm

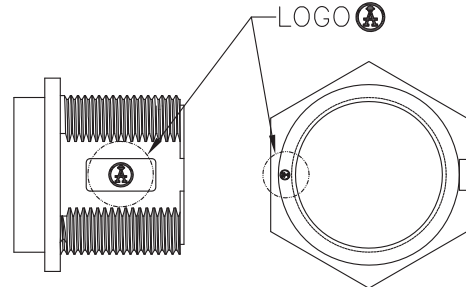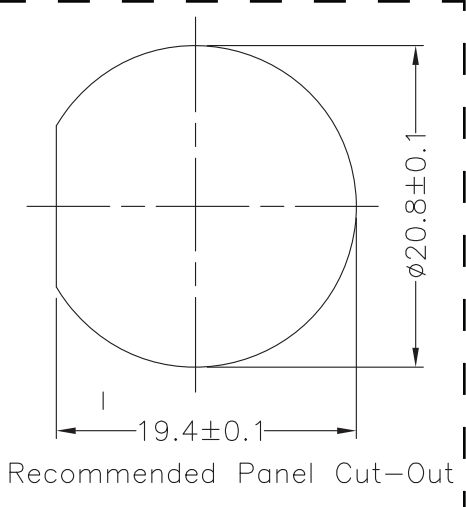

Scale	Free				Date	Name
TOLERANCE					Drawn	07.11.11 Chappell
X.X	±0.25				Approved	
X.XX	±0.1					
X.XXX	±0.05					
DIM	TOL					
X.°	±1°					
X.X°	±X°	①	Revised part number/information	11.07.13	Wilson	
Angle	TOL	Id.	Modification	Date	Name	

Title		Waterproof USB2.0 panel mount	
		A type, Male to Male wafer, .05 meter	
ASSMANN WSW-No.		A-USB-APFS	
Drawing-No.		rev01	
Replace		Sheet 1/1	

Unit: mm



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us