


PC-Board layout
view component side

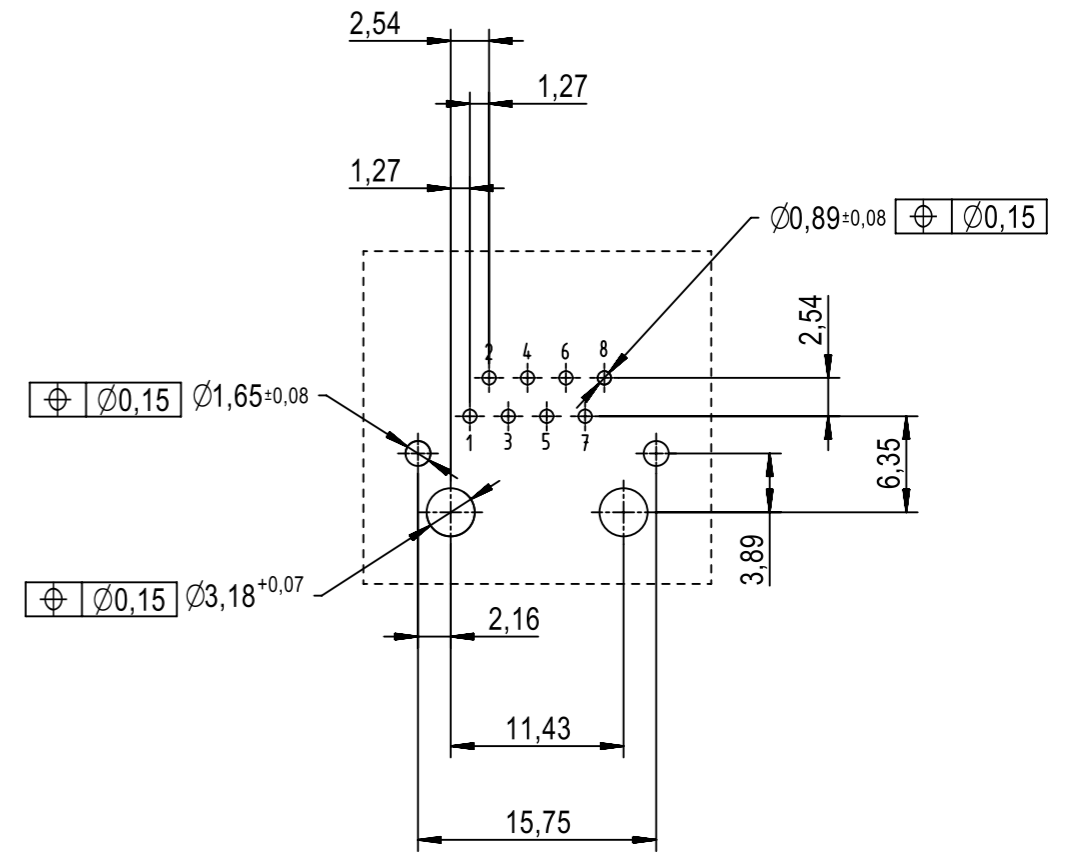

Material:

- Shielding: Copper alloy with nickel plating and tin in pin solder area
- Insert: thermoplastic UL-94-V0, black
- Contact: Alloy with selective gold plating (0.76 um) over nickel in contact area.
- Tin plating over nickel in solder area.

Electrical and mechanical data:
 RF performance Category 5 acc. ISO IEC 11 801:2002
 Temperature: -20°C to 70°C
 Min 500 mating cycles

	All rights reserved		Created by DOUGE		Inspected by BAGDIKIAN		Standardisation KOHLER		Date 2014-01-08		State Final Release		
	Department EC PD - FR		Title RJ45 jack Cat.5 THT vertical 16x16		Doc-Key / ECM-Nr. 100216470/UGD/002/A 50000070138		Rev. A		Page 1/1				
HARTING Electronics GmbH D-32339 Espelkamp		Type TB		Number 09455511120									