
Pomona®

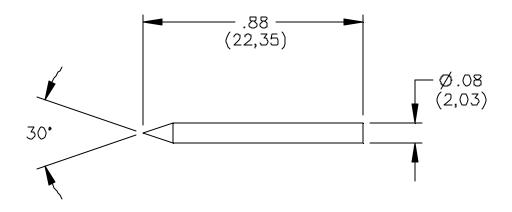

FEATURES:

- #2 Sharp tapered tip for piercing conformal coating and surface contamination
- Plugs into pin tip jacks; example Pomona Model 3542.
- Used on Model Numbers 5676, 5677A, 5309, 5075, 5950, 59515689, 5325

MATERIALS:

Stainless Steel 410 passivated

ORDERING INFORMATION: Model 4174

Parts are packaged 10 per bag

All dimensions are in inches. Tolerances (except noted): $.xx = \pm.02$ " (,51 mm), $.xxx = \pm.005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

| 6/9/99 | Sales: 800-490-2361 Fax: 888-403-3360 |
|---|---------------------------------------|
| SY/EH/LS | Technical Assistance: 800-241-2060 |
| S:\Engineering \Release \DataSheets \FlukeDataSheet \d4174_1_01.doc | |