


1. NOTE DELETED.
2. HOUSING: FLAME RETARDANT 94V-0 RATED, GLASS FILLED, NYLON OR POLYESTER, COLOR: BLACK.
3. SHELL: CARBON STEEL.
4. CONTACT: PHOS. BRONZE.
5. RETENTION SCREWLOCK: BRASS.
6. NOTE DELETED.
7. SHELL: .000200 MIN TIN OVER .000100 MIN COPPER.
8. RETENTION SCREWLOCK: .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL OVER COPPER FLASH.
9. CONTACT: PLATED WITH .000030 GOLD FOR LENGTH OF .100 MIN FROM MATING END, WITH POINT OF MEASUREMENT .050 FROM MATING END OF CONTACT, .000100-.000200 TIN OR TIN LEAD ON SOLDER END, ALL OVER .000050 NICKEL ON ENTIRE CONTACT.
10. NOTE DELETED.
11. DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
12. .110 MAX IN SHELL TAB CLINCH AREAS.
13. ORIENTATION IS OPTIONAL AND MAY NOT BE AS SHOWN.

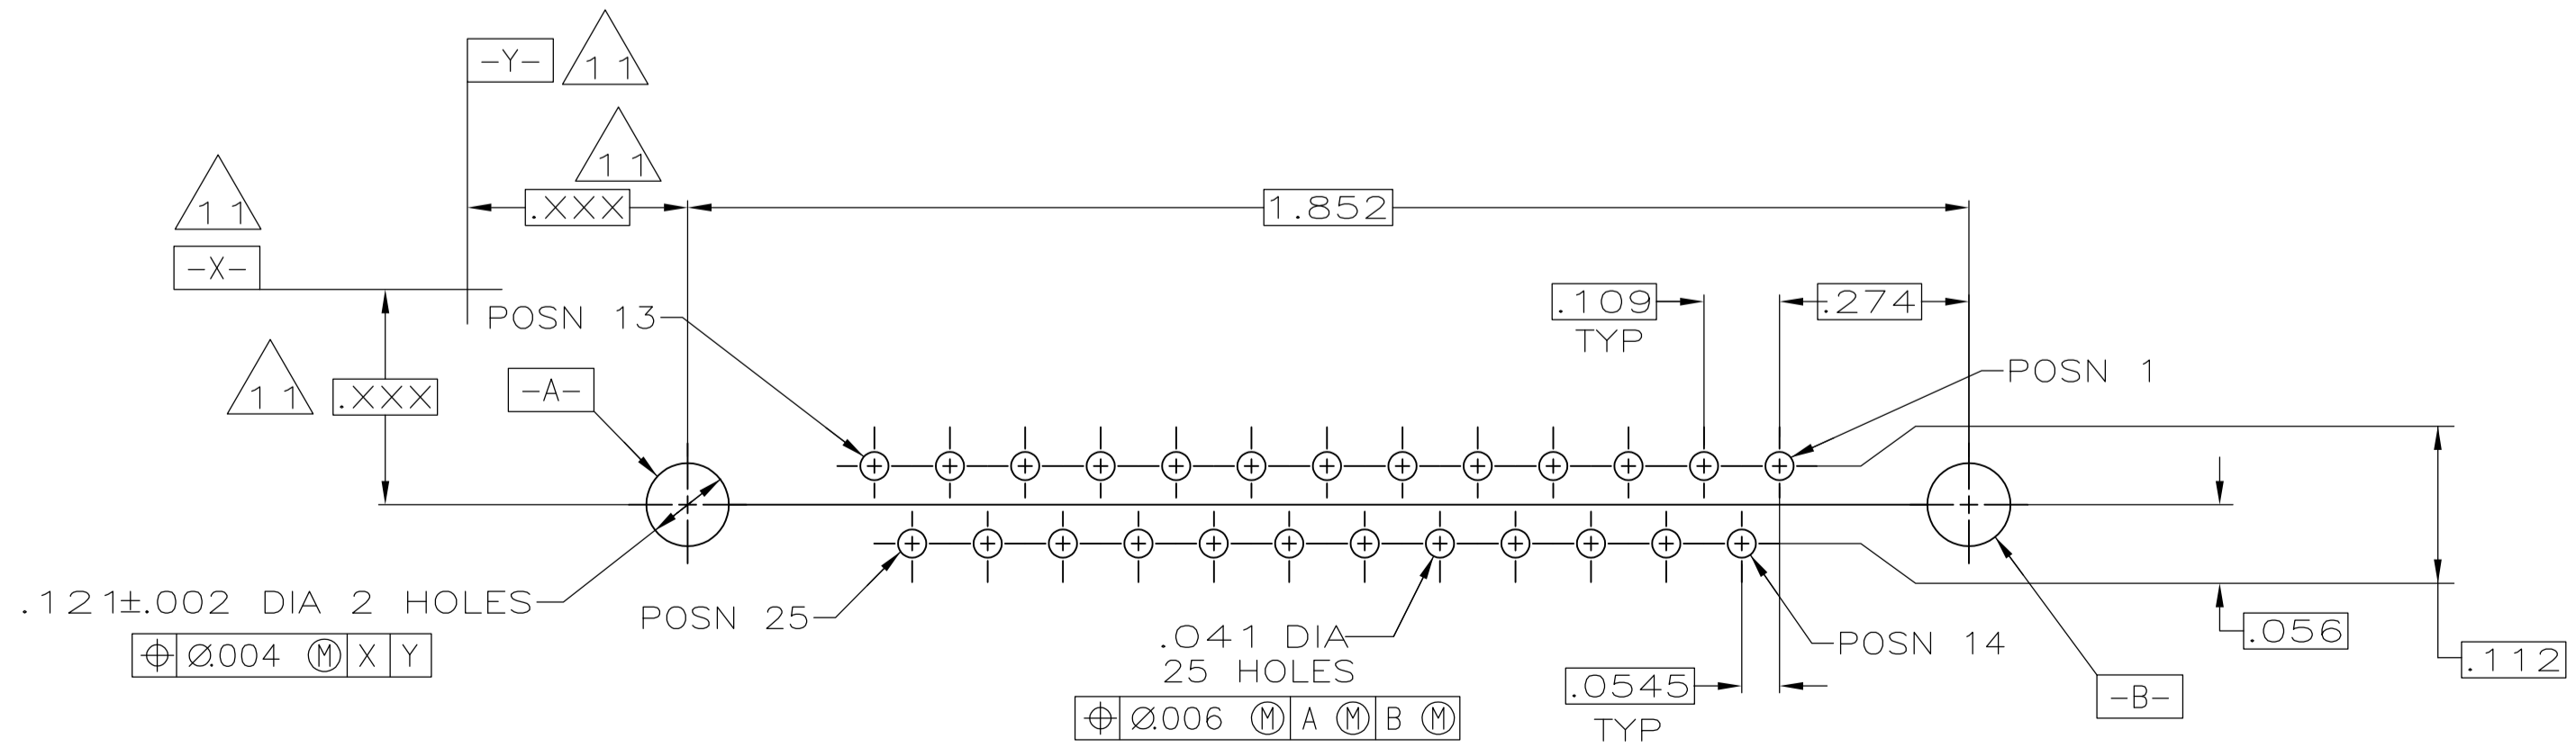

PC BOARD MOUNTING DIMENSIONS  
 CONNECTOR SIDE OF BOARD  
 .062 PC BOARD THICKNESS

748612-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN C.RICHARD 1-5-88	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: INCHES		CIK W.LENKER 1-6-88	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME
0 PLC ± -		PRODUCT SPEC 108-40025	
1 PLC ± -		APPLICATION SPEC 114-40023	
2 PLC ± -		SIZE A1	CAGE CODE DRAWING NO 00779
3 PLC ± .005		WEIGHT	748612
4 PLC ± -		CUSTOMER DRAWING	
ANGLES ± ± -		SCALE 4:1	SHEET 1 OF 1
MATERIAL FINISH		REV G	