


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A	INITIAL RELEASE PER ECO-16-012814	08-30-2016	HD

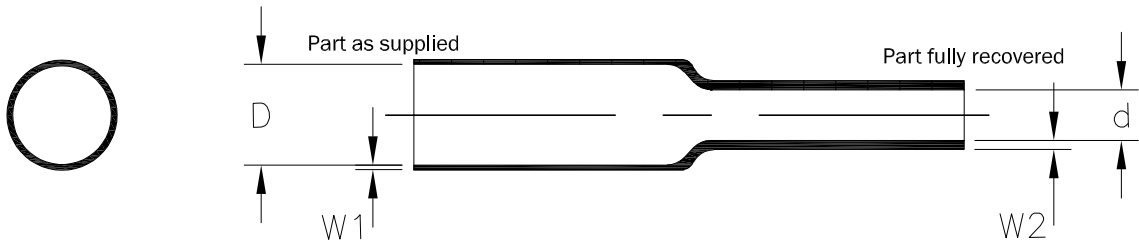

**TUBING DIMENSIONS METRIC**

Size	As Supplied (mm)		As Recovered (mm)	
	Inside Diameter	Wall Thickness	Inside Diameter	Wall Thickness
	<b>D</b>	nominal <b>W1</b>	maximum <b>d</b>	minimum <b>W2</b>
0.8/0.4	1.2 ± 0.25	0.1	0.4	0.25
1.0/0.5	1.4 ± 0.25	0.1	0.5	0.25
1.5/0.75	1.9 ± 0.25	0.1	0.75	0.25
2.0/1.0	2.3 ± 0.25	0.1	1.0	0.26
2.5/1.25	2.8 ± 0.25	0.15	1.25	0.28
3.0/1.5	3.3 ± 0.25	0.15	1.5	0.28
3.5/1.75	3.8 ± 0.25	0.15	1.75	0.28
4.0/2.0	4.4 ± 0.25	0.15	2.0	0.28
6.0/3.0	6.5 ± 0.4	0.15	3.0	0.33
9.0/4.5	9.5 ± 0.4	0.15	4.5	0.33
12.0/6.0	12.9 ± 0.5	0.15	6.0	0.33
18.0/9.0	19.2 ± 0.6	0.2	9.0	0.46
25.0/12.5	26.4 ± 1.0	0.2	12.5	0.46

**MATERIAL:** SWFR X4 is a 125°C, 300 volt, VW-1 rated, UL recognized tubing meeting the requirements of UL 224. It is fabricated from Zerohal flame-retarded crosslinked modified flexible polyolefin.

**COLOR:** Black

RELEASED FOR PUBLICATION APR , 2016.

ALL RIGHTS RESERVED.

© COPYRIGHT 2016 TE Connectivity

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2016 TE Connectivity

DIMENSIONS: mm	DWN HD	20APR2016	MATERIAL	-	FINISH	-
	CHK	-				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	-				
0 PLC ± -	PRODUCT SPEC	-	NAME			
1 PLC ± -	APPLICATION SPEC	-	SWFR X4 SINGLE WALL			
2 PLC ± -			HEAT SHRINKABLE TUBING			
3 PLC ± -			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
4 PLC ± -			A4	06090	© SWFR_X4	-
ANGLES ± -	WEIGHT	0	CUSTOMER DRAWING			
			SCALE	NTS	SHEET	1 OF 1
			REV A			