Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

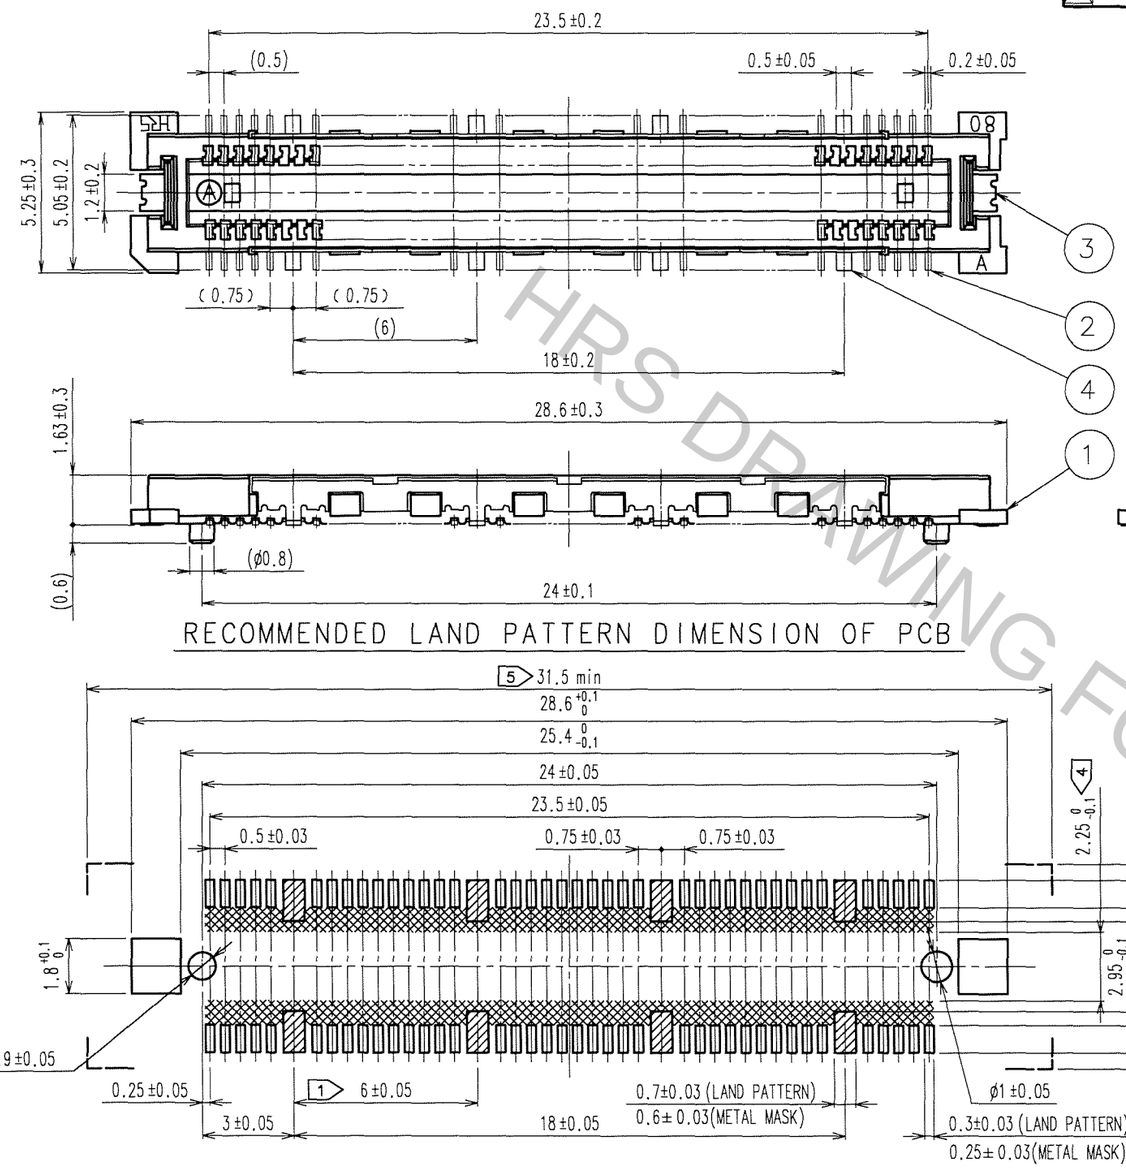

RECOMMENDED LAND PATTERN DIMENSION OF PCB

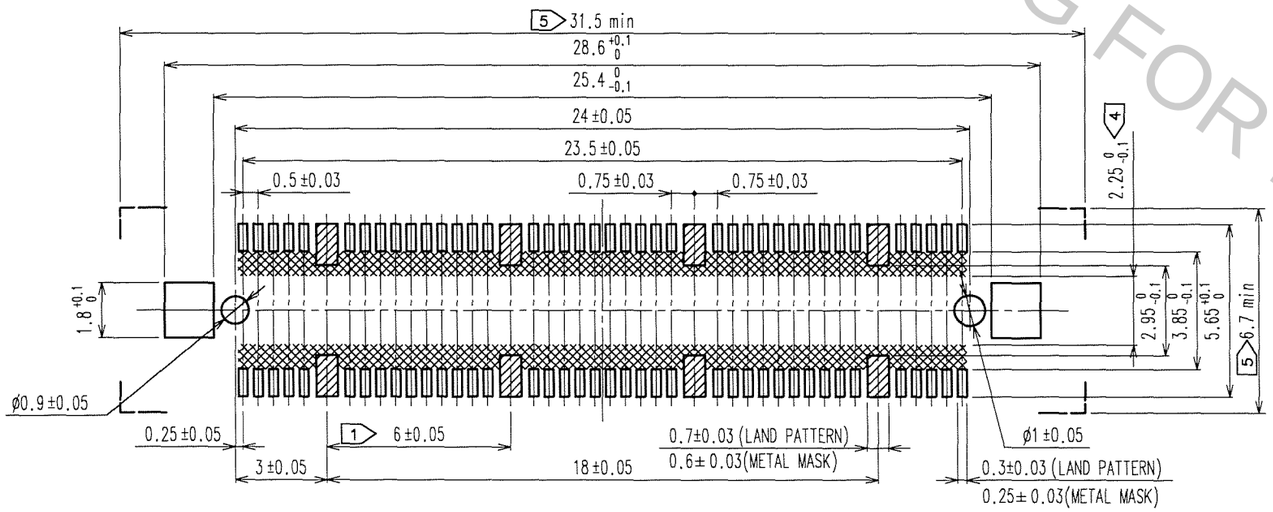

SIGNAL PORTION CROSS SECTION (10 : 1)

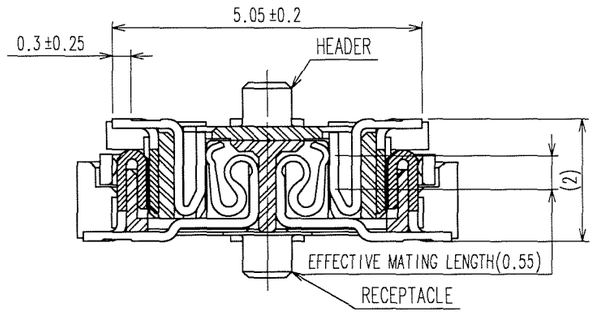

GROUND PORTION CROSS SECTION (10 : 1)

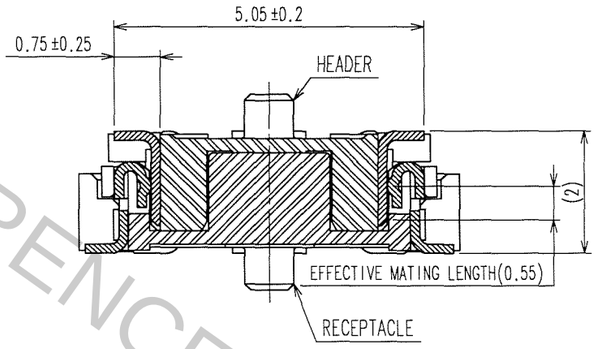

HRS DRAWING FOR REFERENCE

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
4	PHOSPHOR BRONZE	TIN-PLATING	2	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm min.
3	PHOSPHOR BRONZE	TIN-PLATING			LEAD AREA:GOLD FLASH
1	LCP	BEIGE UL94V-0			UNDER PLATING:NICKEL 1μm min.

NOTES
1. 8 HATCHED ▨ PARTS:GROUND CIRUIT.
2. SMT LEAD-COPLANARITY:0.1 MAX.
3. THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
4. MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED ▩ AREA.)
5. DO NOT MOUNT OTHER DEVICES ONTO ⊏ ⊐ AREA ,OR MATING PAIR CANNOT BE MATED.
6. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

TO
PCK

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	K.NAKAMURA 06.04.25	K.NAKAMURA 06.04.25	C.Ozawa '06.04.25	H.Okawa '06.04.26	

SCALE	DRAWING NO.	PART NO.
5 : 1	EDC3-152093-25	FX11LA-80P/8-SV(71)
UNITS mm	HRS HIROSE ELECTRIC CO.,LTD.	CODE NO. CL573-0003-0-71 1/1

FORM NO.229