


## A Dimensions: [mm]












Scale - 2:1

Reference on drawing	Description				
Marking	R56 (Inductance Code)				

## B Recommended land pattern: [mm]



Scale - 2:1

## C Schematic:



# **D Electrical Properties:**

Properties	Test conditions		Value	Unit	Tol.
Inductance	100 kHz/ 10 mA	L	0.56	μН	±20%
Rated current	∆T = 40 K	I <sub>R</sub>	18.5	А	max.
Saturation current	IΔL/LI < 20%	I <sub>sat</sub>	28.0	А	typ.
DC Resistance	@ 20°C	R <sub>DC</sub>	1.40	mΩ	typ.
DC Resistance	@ 20°C	R <sub>DC</sub>	1.70	mΩ	max.
Self resonant frequency		f <sub>res</sub>	59	MHz	typ.

## **E General information:**

It is recommended that the temperature of the part does not exceed 125°C under worst case operating conditions.

- •Ambient temperature: -40°C to +85°C (refering to I<sub>R</sub>)
- •Operating temperature: -40°C to +125°C
- •Storage temperature (on tape & reel): -20°C to +40°C; 75% RH max.
- •Test conditions of Electrical Properties: 20°C, 33% RH if not specified differently

1.9	2015-05-18	SSt	DDe
1.8	2014-09-04	SSt	DDe
1.7	2013-12-18	SSt	SSt
1.6	2013-09-03	SSt	DDe
1.5	2013-04-29	SSt	SSt
1.4	2012-12-06	SSt	SSt
1.3	2012-10-25	SSt	BD
REV/	DATE	RV	CHECKED



Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com

DESCRIPTION

# **WE-LHMI SMD Power Inductor**

Order.- No.

Size: 1335

744373770056




SIZE A4


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment only. This product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, strip control), transportation (automotive control, train control, strip control), transportation (automotive control, train control, strip control), transportation (automotive control, train control, trai the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.



# F1 Typical Inductance vs. Current Characteristics:

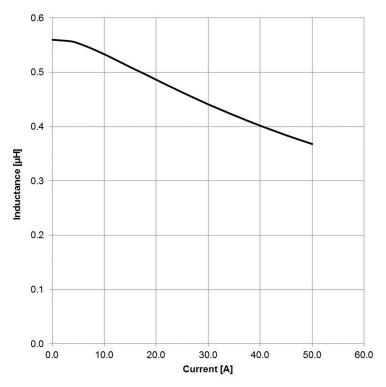


# **F2 Typical Temperature Rise vs. Current Characteristics:**

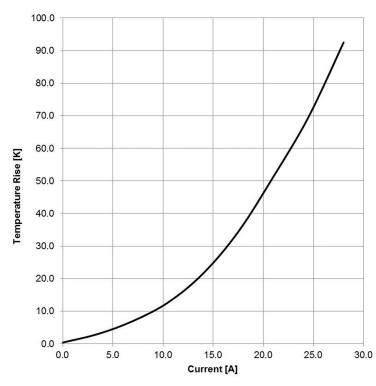


				Projection ,		DESCRIPTION						
1.9	2015-05-18	SSt	DDe	<del></del>								
1.8	2014-09-04	SSt	DDe	9		WE-LHMI SMD Power Inductor						
1.7	2013-12-18	SSt	SSt	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1		1						
1.6	2013-09-03	SSt	DDe									
1.5	2013-04-29	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT	SIZE				
1.4	2012-12-06	SSt	SSt	Germany Tel. +49 (0) 79 42 945 - 0		-440-0-0	ROHS&REACH	OIZE				
1.3	2012-10-25	SSt	BD	www.we-online.com eiSos@we-online.com	744373770056 V WORTH ELEKTE		TOTAL PERMANA	A4				
REV	DATE	BY	CHECKED	eloos@we-online.com		Size: 1335						


# **G Packaging Specification - Tape and Reel [mm]:**

# sectional drawing A-A

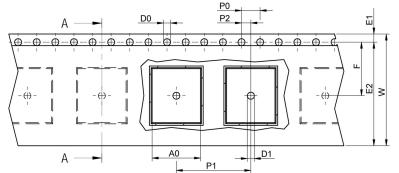






		Α0	В0	w	P1	т	T1	Т2	K0	D0	D1	E1	E2	F	P0	P2	Таре	VPE / packaging unit
	tolerance	typ.	typ.	±0,3	±0,1	max.	min.	ref.	typ.	+0,1	min.	±0,1	min.	±0,05	±0,1	±0,05		pcs.
size	4012	4,40	5,00	12,00	8,00	0,60	0,10	1,80	1,50	1,50	1,50	1,75	10,25	5,50	4,00	2,00	Polystyrene	4000
size	4020	4,40	5,00	12,00	8,00	0,60	0,10	2,60	2,30	1,50	1,50	1,75	10,25	5,50	4,00	2,00	Polystyrene	3000
size	5020	5,50	6,30	12,00	8,00	0,60	0,10	2,60	2,30	1,50	1,50	1,75	10,25	5,50	4,00	2,00	Polystyrene	3000
size	5030	5,50	6,20	12,00	8,00	0,60	0,10	3,60	3,30	1,50	1,50	1,75	10,25	5,50	4,00	2,00	Polystyrene	2000
size	7030	7,00	7,70	16,00	12,00	0,60	0,10	3,60	3,30	1,50	1,50	1,75	14,25	7,50	4,00	2,00	Polystyrene	1000
size	7050	7,00	7,70	16,00	12,00	0,60	0,10	5,60	5,30	1,50	1,50	1,75	14,25	7,50	4,00	2,00	Polystyrene	800
size	8030	8,70	10,20	24,00	16,00	0,60	0,10	3,40	3,10	1,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	1000
size	8040	8,70	10,20	24,00	16,00	0,60	0,10	4,40	4,10	1,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	800
size	1040	10,40	11,60	24,00	16,00	0,60	0,10	4,80	4,50	1,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	500
size	1335	12,90	14,10	24,00	16,00	0,60	0,10	4,30	4,00	1,50	1,50	1,75	22,25	11,50	4,00	2,00	Polystyrene	500

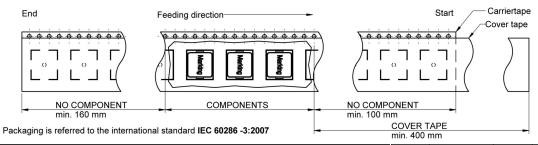











		Α	В	С	D	N	W1	W2	W3	W3
tolerar	nce	± 2,0	min.	± 0,8	min.	min.	+ 2	max.	min.	max.
	12 mm	330,00	1,50	13,00	20,20	60,00	12,40	18,40	11,90	15,40
Tape width	16 mm	330,00	1,50	13,00	20,20	60,00	16,40	22,40	15,90	19,40
	24 mm	330,00	1,50	13,00	20,20	80,00	24,40	30,40	23,90	27,40





		Pull-of force
	12 mm	0,1 N - 1,3 N
Tape width	16 mm	0,1 N - 1,3 N
	24 mm	0,1 N - 1,3 N

1.9	2015-05-18	SSt	DDe	
1.8	2014-09-04	SSt	DDe	
1.7	2013-12-18	SSt	SSt	
1.6	2013-09-03	SSt	DDe	
1.5	2013-04-29	SSt	SSt	
1.4	2012-12-06	SSt	SSt	
1.3	2012-10-25	SSt	BD	
REV	DATE	BY	CHECKED	



eiSos@we-online.com

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com DESCRIPTION

# **WE-LHMI SMD Power Inductor**

Order.- No.

Size: 1335

744373770056



ONIK A4

SIZE

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard and reliability standard and reliability standard is especially required or where a failure of the products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

## **H Soldering Specifications:**



# **H1: Classification Reflow Profile for SMT components:**



## **H2: Classification Reflow Profiles**

Profile Feature	Pb-Free Assembly	
Preheat - Temperature Min (T <sub>smin</sub> ) - Temperature Max (T <sub>smax</sub> ) - Time (t <sub>s</sub> ) from (T <sub>smin</sub> to T <sub>smax</sub> )	150°C 200°C 60-120 seconds	
Ramp-up rate (T <sub>L</sub> to T <sub>P</sub> )	3°C/ second max.	
Liquidous temperature (T <sub>L</sub> ) Time (t <sub>L</sub> ) maintained above T <sub>L</sub>	217°C 60-150 seconds	
Peak package body temperature (Tp)	See Table H3	
Time within 5°C of actual peak temperature (tp)	20-30 seconds	
Ramp-down rate (T <sub>P</sub> to T <sub>L</sub> )	6°C/ second max.	
Time 25°C to peak temperature	8 minutes max.	

refer to IPC/JEDEC J-STD-020D

## **H3: Package Classification Reflow Temperature**

	Package Thickness	Volume mm³ <350	Volume mm³ 350 - 2000	Volume mm³ >2000
PB-Free Assembly	< 1.6 mm	260°C	260°C	260°C
PB-Free Assembly	1.6 - 2.5 mm	260°C	250°C	245°C
PB-Free Assembly	≥ 2.5 mm	250°C	245°C	245°C

refer to IPC/JEDEC J-STD-020D

				Projection .		DESCRIPTION					
1.9	2015-05-18	SSt	DDe	<del></del>		WE-LHMI SMD Power Inductor					
1.8	2014-09-04	SSt	DDe								
1.7	2013-12-18	SSt	SSt	Würth Elektronik eiSos Gmbl	H & Co. KG						
1.6	2013-09-03	SSt	DDe	EMC & Inductive Solutions Max-Eyth-Str. 1							
1.5	2013-04-29	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT	SIZE			
1.4	2012-12-06	SSt	SSt	Germany Tel. +49 (0) 79 42 945 - 0		744070770000	ROHS&REACH	OIZE			
1.3	2012-10-25	SSt	BD	www.we-online.com eiSos@we-online.com	744373770056 WÜRTH ELEKTRO		Town Ellandon	A4			
REV	DATE	BY	CHECKED	eloos@we-offilite.com		Size: 1335					

This electronic component has been designed and developed for usage in general electronic equipment only. This product is neasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use.
Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, ship control), transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

## **I Cautions and Warnings:**

# The following conditions apply to all goods within the product series of WE-LHMI of Würth Elektronik eiSos GmbH & Co. KG:

## General:

All recommendations according to the general technical specifications of the data sheet have to be complied with.

The usage and operation of the product within ambient conditions, which probably alloy or harm the wire isolation, has to be avoided.

If the product is potted in customer applications, the potting material might shrink during and after hardening. The product is exposed to the pressure of the potting material with the effect that the core, wire and termination is possibly damaged by this pressure and so the electrical as well as the mechanical characteristics are endangered to be affected. After the potting material is cured, the core, wire and termination of the product have to be checked if any reduced electrical or mechanical functions or destructions have occurred.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply to customer specific products.

Cleaning agents that are used to clean the customer application might damage or change the characteristics of the component, body, pins or termination.

Direct mechanical impact to the product shall be prevented as the iron powder material of the core could flake or in the worst case it could break

### Product specific:

Follow all instructions mentioned in the datasheet, especially:

- The soldering profile has to be complied with according to the technical reflow soldering specification, otherwise this will void the
  warranty
- •All products shall be used before the end of the period of 12 months based on the product date code, if not a 100% solderability can't be ensured.
- Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.

The general and product specific cautions comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable; however, no responsibility is assumed for inaccuracies or incompleteness.



				Pro
1.9	2015-05-18	SSt	DDe	Н
1.8	2014-09-04	SSt	DDe	
1.7	2013-12-18	SSt	SSt	Wü
1.6	2013-09-03	SSt	DDe	EM Ma:
1.5	2013-04-29	SSt	SSt	746
1.4	2012-12-06	SSt	SSt	Ger Tel
1.3	2012-10-25	SSt	BD	ww eiS
REV	DATE	BY	CHECKED	



Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com DESCRIPTION

## **WE-LHMI SMD Power Inductor**

Order.- No.

Size: 1335

744373770056

COMPLIANT ROHS&REACH WÜRTH ELEKTRONIK

SIZE A4

This electronic component has been designed and developed for usage in general electronic equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use.

Moreover Würth Elektronik elSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive returned), transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

## **J Important Notes:**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

## 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

## 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications.

In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

## 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.



## 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered.

The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG.

Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

				Р
1.9	2015-05-18	SSt	DDe	
1.8	2014-09-04	SSt	DDe	
1.7	2013-12-18	SSt	SSt	٧
1.6	2013-09-03	SSt	DDe	E
1.5	2013-04-29	SSt	SSt	7
1.4	2012-12-06	SSt	SSt	G T
1.3	2012-10-25	SSt	BD	v e
REV	DATE	BY	CHECKED	



Würth Elektronik eiSos GmbH & Co. KG
EMC & Inductive Solutions
Max-Eyth-Str. 1
74638 Waldenburg
Germany
Tel. +49 (0) 79 42 945 - 0
www.we-online.com
eiSos@we-online.com

DESCRIPTION

**WE-LHMI SMD Power Inductor** 

Order.- No.

Size: 1335

744373770056



SIZE A4

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard and reliability standard and reliability standard is especially required or where a failure of the products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.